

AUTOMOTIVE CARE

ALL IN ONE TRANSMISSION FLUID

FEATURES

- Blend of high viscosity oil and select additives
- Automatic Transmission Fluid that satisfies the performance requirements of passenger cars, trucks, and highway construction equipment
- Provides stability at wide range of temperatures
- Anti-Wear Properties
- Excellent Lubricant

PROPERTIES

Appearance: Red gel with petroleum oil odor.

Boiling point: >450 °F

Specific gravity: 0.88 gr/cc

Non volatiles: Not Determined

Solubility in water: Negligible

Flash point: (closed cup) >400 °F

Storage stability: Keep away from strong oxidizers and open flames


Flammability: Slightly Flammable

Packaging: 6 gallon Pail

ALL IN ONE TRANSMISSION FLUID is formulated from natural, high viscosity index base oil and select additives. This special blend gives ALL IN ONE has a high static coefficient of friction, providing excellent lubricity properties. It protects against scuffing and wear while providing viscosity stability at a wide range of temperatures. It also provides a high level of oxidation resistance that helps prevent sludge formation and poor transmission operation even after extended usage in high temperature conditions. ALL IN ONE meets the requirements of GM DEXRON-II, FORD TYPE F (M2C33-F), FORD M2C166-H, Daimler-Benz, Detroit Diesel Allison Type C-3, Caterpillar TO-2.

Refer to the label and attached SDS for instructions and precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

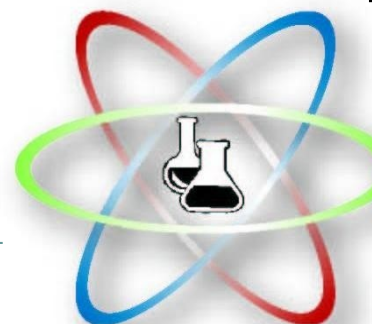

- Properties are typical and subject to usual manufacturing tolerances.