

PROTECTIVE COATING**ANTI-SEIZE LUBRICANT SPRAY****FEATURES**

- Prevents seizing, galling, pitting, galvanic action and thread distortion
- Will not harden, separate or fuse to metals even under severe atmospheric conditions
- Makes tighter, firmer seals possible and will not crack
- Makes disassembly easier by reducing torque requirements
- Effective at temperatures up to 2,100 °F
- Sets up quickly

PROPERTIES

Appearance: Gray viscous liquid with characteristic solvent odor

Vapor density: >1

Specific gravity: 0.97 gr/cc

Volatiles : 70 %

Chemical type: Hydrocarbon blend

Storage stability: Keep away from open flame and below 120 °F.

Boiling point: 175 °F

Flash point: 34 °F (liquid, T.O.C.)


Flammability: Highly Flammable spray

Solubility in water: Negligible

Packaging: 12x12oz Net Wt. Cans/Case

ANTI-SEIZE is an extreme Temperature and Pressure sealant / Lubricant that protects metal from galling, seizing or pitting. It reduces friction and wear and makes tighter, firmer joints that also open easier. Completely non corrosive and inert to rubber makes it useful on metal to metal and metal to rubber joints. To use, spray directly onto surface or joints and leave to set. Use **ANTI-SEIZE** lubricant in Refineries, Shipyards, Chemical Plants, Food and Bottling Plants, Factories, Mining and Industrial Plants, on all mechanical equipment like engines, bearings, turbines, boilers, gears, heat exchangers and drills. Do not use directly on electrical parts or electronic boards. Refer to the attached SDS for additional precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

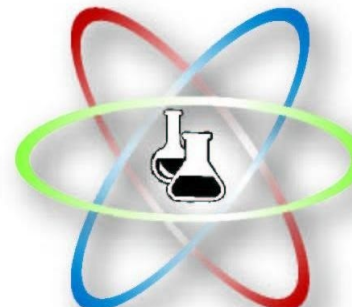

- Properties are typical and subject to usual manufacturing tolerances.