



CT - 537

FLOOR CARE

# CLEAR CONCRETE SEALER

## FEATURES

- Epoxy Acrylic Polyurethane System
- Polymeric sealer on all hard, porous surfaces such as concrete, marble, granite, terrazzo and more
- Provides resistance to heavy traffic while imparting a high gloss to the surface

## PROPERTIES

**Appearance:** Milky white liquid.

**Boiling point:** 212 °F

**Specific gravity:** 1.05 gr/cc

**Non volatiles:** 25 %

**Solubility in water:** Soluble

**Flash point:** None

**Storage stability:** Keep away from strong oxidizers and acids

**pH of liquid:** 9-10

**Flammability:** Non-Flammable

**Packaging:** 5 gallon Pail

CLEAR CONCRETE SEALER is a water based, polyurethane system to be used as a polymeric sealer on concrete, cement, porous tile & grout. It can also be used on other surfaces such as hard porous floors, granite, terrazzo, slate, marble, rubber, quarry, and vinyl tile floors. Do not dilute and apply with sprayer, soft roller or mop. Apply a uniform film on the pre-stripped, clean surface. Allow to dry for 2 hours before recoating. Second coat should be applied perpendicular to the first coat. If additional gloss or resistance to heavy traffic is required, apply three coats. Allow 24 hours drying time before reoccupying the given area.

Refer to the label and SDS for additional instructions and precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron


3911 SW 47th AVE

Davie, Florida 33314

Tel: (954) 584 - 4530

Fax: (954) 584 - 4531

[www.chemtron.com](http://www.chemtron.com)

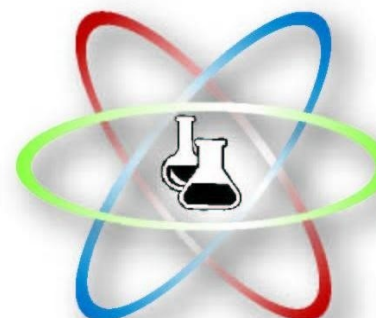

- Properties are typical and subject to usual manufacturing tolerances.

PROFESSIONAL FLOOR CARE PRODUCTS