



CT – 577

RESILIENT FLOOR CARE **DURA FINISH**

FEATURES

- **Non-yellowing, low maintenance formula offers superb black mark and scuff resistance.**
- **For no-buff, spray-buff and high-speed systems.**
- **Large area coverage - up to 3000 sq. ft. per gallon.**
- **Fast-drying - 20 to 30 minutes under normal conditions.**
- **Hard finish for high traffic resistance.**
- **Slip-resistant—Meets ASTM D2047**

PROPERTIES

Appearance: Milky liquid with bland odor.

Boiling point: 100 °C (212 °F)

VOC: 4.2%

Specific gravity: 1.03 gr/cc

Vapor Pressure: < 30 mmHg

Solubility in water: Miscible

Flash point: None

Storage stability: Keep away from direct sun light and open flames

pH: 8.0-9.0

Packaging: 4x1 gallon Case
5 gallon Pail
55 gallon Metal Drum

- Properties are typical and subject to usual manufacturing tolerances.


DURA FINISH is designed to retain a high gloss, scuff and mark-free appearance with little or no maintenance. Ideal for areas where equipment is not available or where it's not practical to use, such as classrooms, offices, and patient rooms.

For use with non-buff, spray buff and high speed systems.

For best results apply 3 coats to the floor. See label for additional instruction.

Refer to the label and SDS for additional instructions and precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

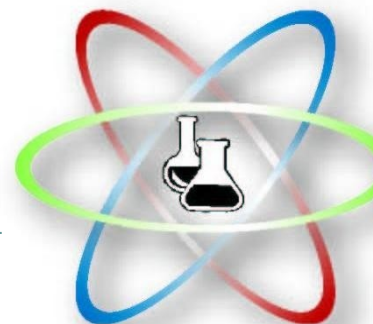

PROFESSIONAL ENGINEERING PRODUCTS