



CT - 716

OILS & LUBRICANTS

HIGH LOAD GEAR OIL 85W140

FEATURES

- Ideal for any type of enclosed gears
- Designed to withstand the most severe shock loads
- Perfect for heavy duty applications

PROPERTIES

Appearance: Transparent, amber oil with petroleum oil odor.

Boiling point: >450 °F

Specific gravity: 0.88 gr/cc

Non volatiles: Not Determined

Solubility in water: Negligible

Flash point: >400 °F

Storage stability: Keep away from oxidizing atmospheric conditions.

Flammability: Slightly flammable


Packaging: 4x1 gallon Case
5 gallon Pail

- Properties are typical and subject to usual manufacturing tolerances.

HIGH LOAD GEAR OIL 85W140 is formulated with premium quality paraffin base stocks to excel in heavy duty applications. It is designed to withstand the most severe shock loads and thrive in conditions where conventional oils break down. HIGH LOAD GEAR OIL 85W140 is composed of extreme pressure additives, adhesives and cohesive agents that make it immediately climb and cling to gears to provide maximum protection. It may be used in virtually all types of enclosed gears.

Refer to the label and attached SDS for instructions and precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

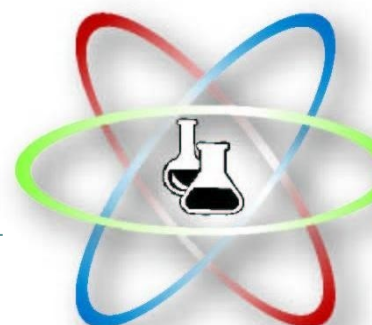

PROFESSIONAL ENGINEERING PRODUCTS