



CT - 335

PROTECTIVE COATING

POLYBAR WR , Water Repellent

FEATURES

- Seals Wood, Concrete and porous surfaces and leaves a protective barrier
- Excellent water repellent
- Concentrated formula needs fewer applications
- Excellent adhesion to substrate forming a semi-permanent bond
- Safe to handle, easy to use
- Water base formula

PROPERTIES

Appearance: Milky white emulsion with no particular odor

Boiling point: 212 °F

Specific gravity: 1.04 gr/cc

Non volatiles: 18 %

Solubility in water: Miscible

Flash point: 120 °F

Storage stability: Keep container sealed away from open flames and oxidizers

pH of liquid: 5.5


Flammability: combustible

Packaging: 4 gallon cases
5 gallon Pail
15 gallon Drum

POLYBAR WR dries fast and will not affect the natural appearance of the surface and can be removed if necessary with wax strippers. Before applying product, clean the target surface. POLYBAR WR can be applied undiluted or diluted up to 5 times with water; use a sprayer, brush, mop, sponge or roll into surface, microfiber cloth or roll is recommended. If required, several coats can be applied for greater repellency. Leave sufficient time to dry before recoating. POLYBAR WR can also be used on fabrics, curtains and textiles. For best performance dry under the sun or use a hair dryer. Allow at least 1 hour for complete cure and drying of the coating. Avoid contact with eyes and skin, if on eyes or skin, wash with soap and water before it dries. Keep out of children's reach.

Do not mix POLYBAR WR with other chemicals. Refer to the label and SDS for additional instructions and precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

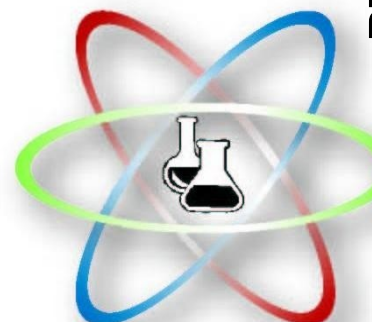

PROFESSIONAL ENGINEERING PRODUCTS

- Properties are typical and subject to usual manufacturing tolerances.