



CT - 573

RESILIENT FLOOR CARE URETHANE FINISH

FEATURES

- Special for resilient floors
- Long lasting seal and finish that does not turn yellow
- Fast drying - 30 minutes under normal conditions
- Large area coverage - up to 2500 sq. ft. per gallon
- Slip resistant - Meets ASTM D2047

PROPERTIES

Appearance: Milky white, opaque liquid with bland odor.

Boiling point: 212 °F

Specific gravity: 1.02 gr/cc

VOC content: 6.7 %

Solubility in water: Miscible

Storage stability: Minimum of 1 Year

pH of liquid: 8-9

Flammability: Non-flammable


Packaging: 4x1 gallon Case
6x1 gallon Case
5 gallon Pail

- Properties are typical and subject to usual manufacturing tolerances.

URETHANE FINISH is a premium, water-based polyurethane finish that provides superior gloss, durability, mark resistance, and repairability. Its exceptional versatility makes it ideal for use with all maintenance programs (non-buff to ultra high-speed). URETHANE FINISH is fast drying and is ideal for use on terrazzo, concrete, slate, marble, quarry, rubber, wood and vinyl tile floors.

For instructions and precautions, refer to the label and attached SDS. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

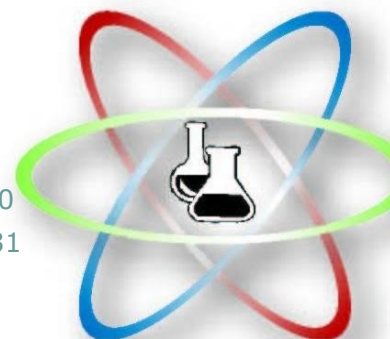

PROFESSIONAL FLOOR CARE PRODUCTS